


INSTRUCTIONS

Product description

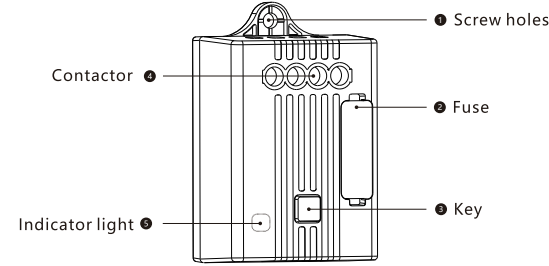

WS1018 Controller
WS1018 Dimming Controller


Specification

Product model: WS1018
Voltage range : 85~260V 50/60Hz
Power rating : WS1018: LED 100W (1A)

Temperature range : -20~50°C
Effective range : 160m(Outdoor)
30m(Indoor)

Communication : WIFI & Ebelong1.1
Capacity : Up to 10 switches can be paired
Sensitivity : -110dBm
Dimension: L70*W44*H29mm
Standards: EN61058-1;2002+A2;2008;
GB 14536.1-2008


Wiring

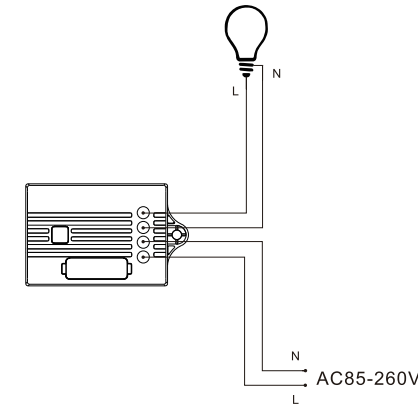

Typical


Installation

Method One

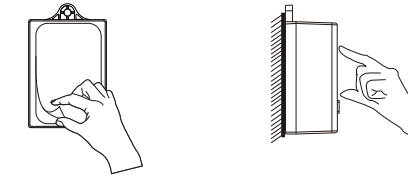

Double sided tape paste


Method Two



Fix with screws

APP Download

Method One



IOS: Search "ENER-J SMART" on APP store


Android: Search "ENER-J SMART" on Google Play

Method Two



Phone pairing

- 1、 After downloading APP, follow the prompts to register the account
- 2、 The phone and APP pair need to use the home wireless router
- 3、 Turn on the power of the controller and confirm that the indicator light rapidly blinks
- 4、 Follow the prompts to select the controller model for quick pairing
- 5、 If the controller is not rapidly blinks, follow the prompts to set the receiver to rapidly blinks



Let the three close


Switch pairing

Switch ordinary pairing

- 1、 Keep press the key of controller for 3 seconds, the indicator light flashes
- 2、 Press down the switch key, the indicator light will go out, which means that the pairing is successful.
- 3、 WS1018: If the pairing switch is push button switch and the lamp is dimming, so can long press the switch to adjust brightness of the lamp.

Switch direction pairing

- 1、 Keep press the key of controller for 3 seconds, the indicator light flashes
- 2、 Quickly press the switch twice (within 0.5 seconds) the indicator light will go out, which means that the pairing is successful.
- 3、 Rocker switch after direction pairing is means always "upside --Off/ downside--On
- 4、 Push button switch left and right two key as a group, press the right key to ON, press the left key to OFF. WS1018 in dimming mode keep press the right key to brighten, keep press the left key to dim.

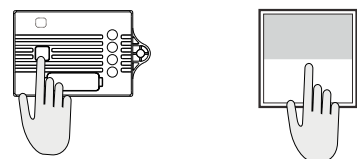


Clear pairing & Replace fuse

Clear pairing information

- 1、 Long press the pairing button for 13 seconds, the indicator light from flashing until it goes off
- 2、 After the pairing information is cleared, the pairing switch is no longer valid. Need to be repaired for use

Replace the fuse


- 1、 After the fuse blows, first remove the fault and replace the same fuse



Combination

Combination

Free combination, Multi control can be achieved

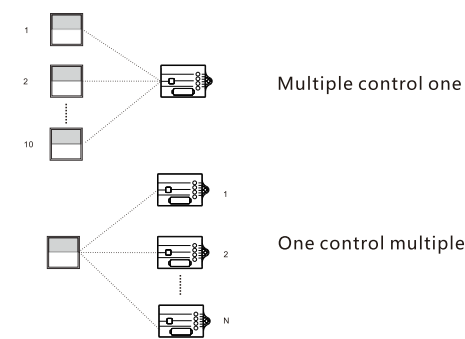


Signal forwarding mode

- 1、 In one control multiple mode, the signal forwarding mode can be turned on to enhance the signal
- 2、 When the mode turned on, the receiver will forward the received binding switch signal once.
- 2、 Long press the pairing button for 7 seconds, leave hold in the indicator light are bright
- 3、 The indicator light flashes once every two seconds when the forwarding mode is turned on

ECHO

- 1、 Rename the device in the "ENER-J SMART" App
- 2、 Add the skill "SMart Life" to Alexa App



- 3、 Discover the device in Alexa app "Smart Home"
- 4、 You can use the voice control controller AS: Alexa, turn on/off bedroom light. Alexa, set bedroom light to 50 percent. Alexa, brighten/dim bedroom light.

CERTIFICATE INSPECTED