



Smart Home Living

Smart Wi-Fi Dual Lens Outdoor Dome IP Camera









Two Way Audio



Smart Tracking



PTZ



HD Night Vision





SKU CODE:

SHA5363 White Housing SHA5364 Black Housing

Ean Code on box: 5061004714800 5061004714718

Packing

Inner packing Qty

1 pc/ Box

Outer Carton Packing Qty
1 sets/Carton

Description

Introducing our innovative Smart Wi-Fi Dual Lens Outdoor Dome IP Camera. Featuring auto-tracking, human detection, and 25m night vision, this camera ensures comprehensive outdoor security. Enjoy two-way audio and compatibility with Alexa Echo Show and Google Home Assistant. With a 320-degree field of view (with PTZ) on one lense and 120 degree view (by hand movement) and dual screens for intuitive monitoring, this camera is perfect for enhancing your home's security.

Features

- **4MP HD Image & Night Vision:** Provides 4MP (2MP+2MP) full HD clearer images and video both day and night, surpassing ordinary 2MP single lense cameras.
- Bluetooth Pairing: Equipped with Bluetooth for fast & easy pairing
- **Human Detection & Real-Time Alarm:** Equipped with human detection to automatically track movements and trigger real-time alarms, sending notifications via the Smart Life app.
- Two-Way Audio & Multi-User Sharing: Built-in microphone and speaker allow for communication from your mobile device, and share access with family, friends, or security personnel.





- SD Card/Cloud Storage & Alexa Compatibility: Supports 24/7 recording with micro SD card (up to 128GB, not included) or cloud storage, and works with Alexa/Google Assistant for voice control.
- **Real Dual-Screen Security Camera:** Captures more details from all angles compared to traditional single-lens cameras, enhancing surveillance efficiency.

Technical Specifications:

Item	Content	Description
Outer Appearance	Design	Form Factor: Dome Camera Product Colour: White/Black Antenna: Visible antenna*2
	Materials	ABS15E1+PC
	Surface Finishing	White/Black
	Waterproof Level	Weatherproof
	Dimensions (LWH)	140x110x89mm (excluding antenna)
Hardware	Platform Information	Hardware Solution: ANYKA KM01 + GC2083 + RTL8188 + 8M Flash
	Chipset	Main Chipset: ANYKA KM01
Camera	Lens	Optics: 4mm, F2.2 aperture Viewing Angle: D:110°*H:88°*V:66° Image Circle: Ø8.9
	Image Sensor	Sensor Type: GC2083 (2MP 1/3.02" Progressive Scan CMOS) X2 Resolution: 1920*1080 Pixel
	Night Vision	Distance: 25M (850nm)
Night Vision	IR Light	4pcs dual lights (IR + white light) *1W/10 meters (λ=850nm) 4pcs dual lights (white light temperature 4200~4600K)
	LED Work	8pcs of IR light, 8pcs of white light
	IR-CUT	Pendulum oscillating IR-CUT
	Photosensitive	Ø3, 550nm
	Low Illumination	Colorful cut black: 3.5Lux; black cut colorful: 5.5Lux



Item	Content	Description
Indicator	Working Indicator	Red light indicates powering on, Blue light indicates WIFI working
Hardware Features	WiFi Module	RTL8188FTY / IEEE 802.11 b/g/n
	Mic	Sensitivity: ≥-36±3dBm, weatherproof
	Speaker	Round inside 8Ω/2W, weatherproof
	TF Card	Max to 128G
	Button Switch	Reset*1
	PTZ	Horizontal Angle: 280° Vertical Angle: 95°
	Power Supply Input	DC 5V 2A
	WiFi Standard	IEEE 802.11 b/g/n, single frequency 2.4G
Software Functions	Audio	Echo Cancellation: Support Two-Way Talk: Support
	Video	Video Format: H.264/H.265 compression Video Stream: 15fps Resolution & Frame Rate: 1080P
Software - APP	Operating System	Android 8.0 and later versions IOS 9.X-10.X and later versions
	Mobile APP	Supports setting/real-time browse/playback/talk/volume/video adjust/record/album/format SD card
	Communication Protocol	WiFi
	On Line Visitor	Max 3 visitors online
	Alarm Type	PUSH message, timed alarm, movement alarm, light/sound alarm
	Detection Sensitivity	0-3 degrees, default 2, low medium high
	Pairing	Scan QR Code for pairing




Item	Content	Description
	Cloud Storage	ТВА
	OTA Upgrade	Support
	Acoustooptic Alarm	Nighttime passive enable, default white light always on
Movement Detection	Activate	Alarm Recording Time: 1 minute Trigger Alarm Interval: 1 minute
Button Definitions	Power Button (key)	5S - Device power ON/OFF
	Reset Button (key)	5S - Device resetting, WiFi automatic configuration status
Wireless Connections	Reset the Device	DongDong prompt tone -> device restart -> the device automatic -> connect successful prompt tone
	Restart the Device	Same as powering on
	Lost Network Connection	APP display offline
Accessories & Packaging	USB Cable	5V, 2A
	Screw Kit	Plastic bag + screws5 + plastic screw4
	User Manual	1рс
	Package	Gift box
Temperature	Temperature Setting	Working: -20 ~ 55 °C, Humidity <95% Storage: -20 ~ 60 °C, Humidity <95%

Box Contents:

- 1x Smart Wi-Fi Dual Lens Outdoor Dome IP Camera
- 1x USB Cable (5V, 2A)
- 1x Screw Kit (plastic bag, screws5, plastic screw4)
- 1x User Manual





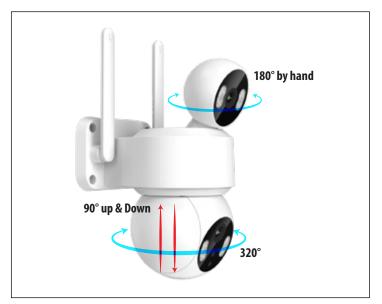







Stuck? Confused?

Contact our Technical Support team on: T: +44 (0)1291 446 105 E: support@ener-j.co.uk Lines are open Mon - Fri (8am to 4pm)

